

GLOBE[®]

MADE IN ITALY



New!!!

PATENTED

XCELLENCE-ONE

EXCLUSIVE
PACK[®]
IN BOXES
OF 25 PIECES

THICKNESS: 1.0 mm

- HIGH PRECISION
- HIGH CUTTING SPEED
- EXTRA LONG DURABILITY
- NO PITTING, NO DISCOLORING, NO BURRS
- EXTRA THIN CUTS



THIN CUTTING

THE MOST PRECISE AND VERSATILE THIN D.C. CUTTING DISC IN THE MARKET



STRAIGHT CUTS



VERY LOW HEAT DEVELOPMENT
NO CUTTING BURRS



EASE OF USE



HIGHER CUTTING SPEED



FLUSH CUTS



PERFECT BALANCE
NO FLUTTERING



NO VIBRATIONS



EXTREME RIGIDITY


GLOBE is proud to present the revolutionary cutting tool

XCELLENCE-ONE

the best choice for precision cutting operations; manufactured using the finest and highest performance abrasives. Offering an extra-long life and extra thin cuts. The PATENTED narrow raised center is the smallest in the market and allows more and deeper cuts than any other competitor. X-CeLLENCE ONE is specially designed to perform:

- 1 HIGH RIGIDITY AND EXTREME PRECISION CUTS**
allows to make fast, easy, straight and accurate cuts on pipes or stainless steel sheets.
- 2 EXTRA THIN CUTS**
- 3 NO BURRS**
no need to finish the edges after the cut.
- 4 COOL CUTS**
without metal overheating or discoloring.
- 5 HIGHEST DURABILITY AND SPEED**
ensures the lowest cost per cut.
- 6 NO CONTAMINATION (Fe, S, Cl FREE)**
formulation for use on stainless steel.
- 7 EXTRA SAFETY**
strong reinforcements to comply the most strict safety standards.
- 8 FLUSH CUTS**
with three special flange
- 9 NO VIBRATIONS, NO BENDING, NO FLUTTERING**

THE METAL NARROW DOME PATENTED

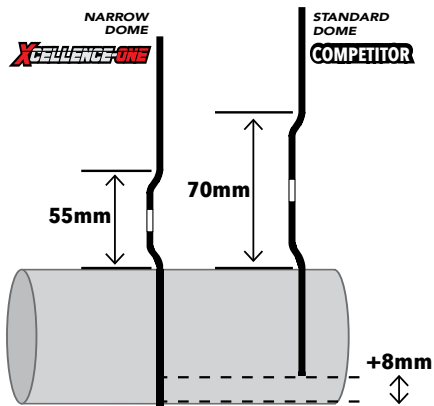

Increased cutting penetration force of the X-CeLLENCE ONE with "narrow dome" compared to a traditional depressed center disc.

The special shape, carefully conceived, of the depressed center minimizes the dimension of the dome to the advantage of the flat part. This allows to carry out more and deeper cuts obtaining the same durability and cutting capacity of a flat disc with the additional advantage of more rigidity and control.

MATERIAL	DIMENSION (diam. - thick. - bore) mm	HARDNESS	USE SPEED	ARTICLE CODE		PLUS LINE
----------	---	----------	--------------	-----------------	--	-----------

NEW
NEW

115x1,0x22,23	ZA 60 SXBF	80 m/s	G1583 •	25PCS
125x1,0x22,23	ZA 60 SXBF	80 m/s	G1584 •	25PCS

DISC DURABILITY ●●●●●●●●●●
CUTTING SPEED ●●●●●●●●●●
CLEAN CUT ●●●●●●●●●●


STAINLESS & STEEL
(Fe, S, Cl < 0,1%)

XCELLENCE ONE
(NARROW DOME®)

COMPETITOR
(FLAT DISC)



**PATENTED
NARROW
DOME**

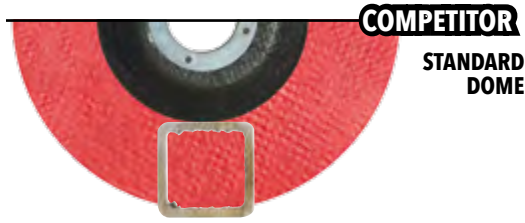


**COMPETITOR
STANDARD
DOME**


The shape of a narrow dome with metal reinforcement gives unparalleled rigidity allowing to perform straight and precise cuts very easily.

The narrow dome allows a greater cutting depth, while the very reduced thickness allows (on stainless steel sheets and profiles) thin cuts without burrs, discoloring and pittings.

BUILT-IN STEEL PROTECTION FLANGE

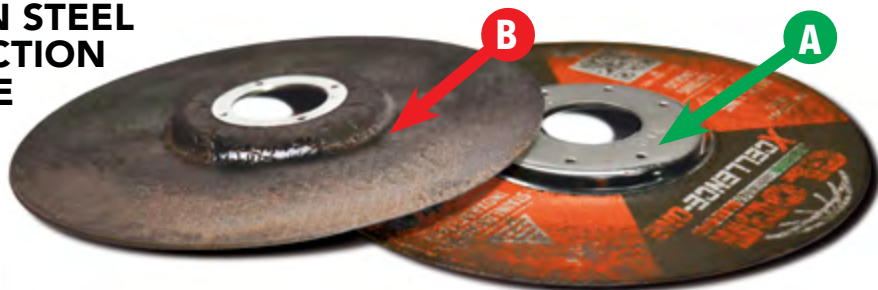

The metal dome **A** of the **X-CELLENCE ONE** disc guarantees more safety, avoids damages to the depressed center **B** and decreases vibrations thus increasing cutting precision and rigidity.

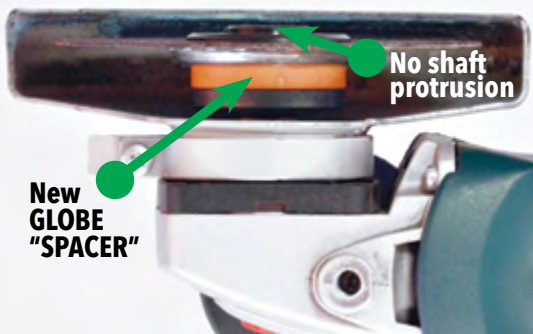

New
**GLOBE
"SPACER"**



Thanks to the use of the special "SPACER" and to the depressed center shape, the machine shaft and the locknut do not extend from the dome cavity thus enabling the operator to carry out flush cuts in a comfortable and safe position. The depressed center shape gives more rigidity than a flat disc, prevents bending allowing to make perfectly straight cuts.

TILE INSTALLERS HAVE A NEW COLLABORATOR: USEFUL, PRECISE AND QUICK.



ESPECIALLY FOR TILERS



TILE JOINTS CUTTING



EASE OF USE



HIGHER WORKING SPEED

THIN-CUT

The new **THIN CUT** disc conceived to carry out very thin cuts of tile joints.

THIN CUT, cuts out the broken tile without damaging the nearby ones.

The ultra-thin thickness allows to cut even the narrower tile joints.

MATERIAL	DIMENSION (diam. - thick. - bore) mm	HARDNESS	USE SPEED	ARTICLE CODE		PLUS LINE
----------	---	----------	-----------	--------------	--	------------------



NEW

115x1,0x22,23	C 60 SBF	80 m/s	G1593	25PCS
---------------	----------	--------	-------	-------

DISC DURABILITY	●●○○○
CUTTING SPEED	●●○○○



MAX-FUN (ADVI)



Scan the QRcode on the label of the disc in order to access the safety information of the product on GLOBE website.



INDUSTRIA ABRASIVI PARMENSE-GLOBE s.r.l.

Via La Spezia, 160 - 43126 Parma - Italy
 Tel. +39.0521.293943 - Fax. +39.0521.293743
 export@globeabrasives.com
 www.globeabrasives.com

